


911 address shall be a minimum 3" lettering permanently marked on meter enclosure, pole, or durable material attached to pole and should be visible from street. (See section 3.4)

Typical Overhead Layout for Mobile Home Park

For details on overhead layout for mobile home parks, see drawing D4-9

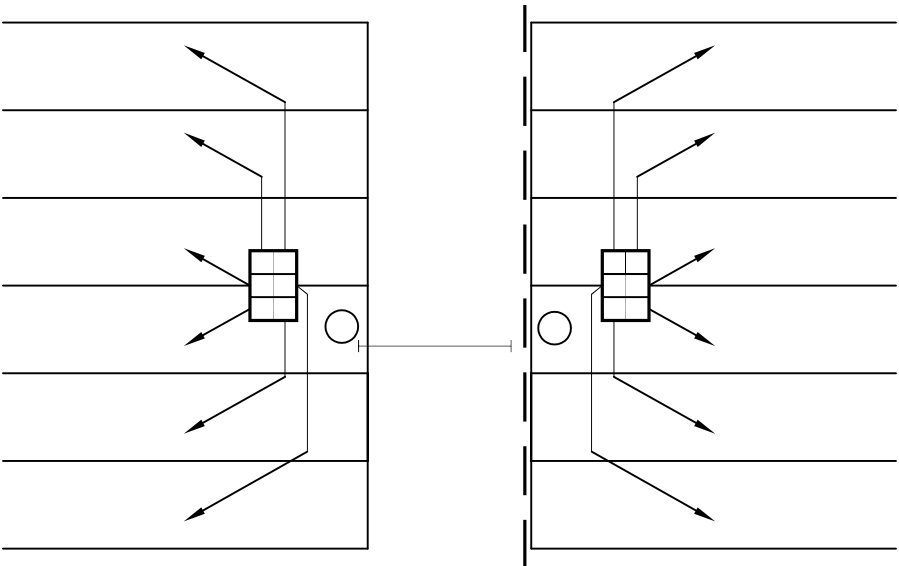


When existing distribution facilities are not along the street, but along the back, service may continue to be provided at the rear; consult Company.

Note:

Meter bank shall be accessible by truck on all weather road approved by Entergy. (See section 4.7)

Typical Underground Layout for Mobile Home Park

For details on underground layout for mobile home parks, see drawing D4-8

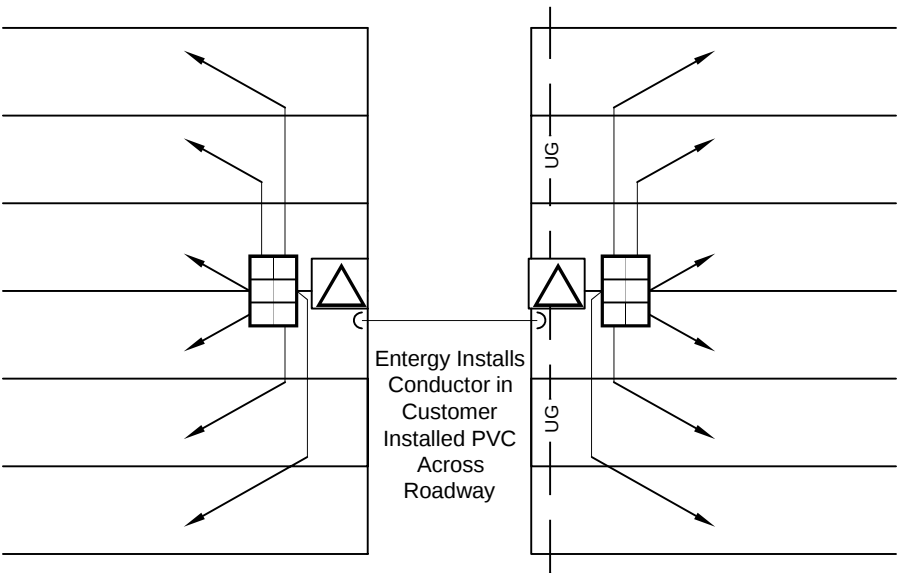

Legend



Utility Pole




Entergy Padmount Transformer or Pedestal




Multiple meter (2 MIN- installation by 6-MAX) Developer



Trailer wiring from meter by developer



Underground Primary Cable



Overhead Primary Cable

CALL 811 TWO BUSINESS DAYS BEFORE YOU DIG

In locations with underground facilities, the Customer shall notify One Call and shall have One Call locate all underground facilities before digging. It shall be the responsibility of the Customer to stay clear of all underground facilities.

ENTERGY SERVICES, INC.

TYPICAL LAYOUT FOR MOBILE HOME PARK WITH MULTIPLE METER INSTALLATIONS

APPROVED BY: GB	DATE: 10/24/2012
CHECKED BY: EB	SCALE: NONE
DRAWN BY: krich95	


2	11-3-25	REVISED PER CUSTOMER INSTALLATIONS 2025	ERG	EB
1	10/12	REVISION OF DRAWING SS4.7-3	JED	
NO.	DATE:	REVISION	BY:	APPR:



No. D4-10

PLOT 1=1 SH. 1 OF 1

Shall meet requirements of drawings D4-10 and D9-2.

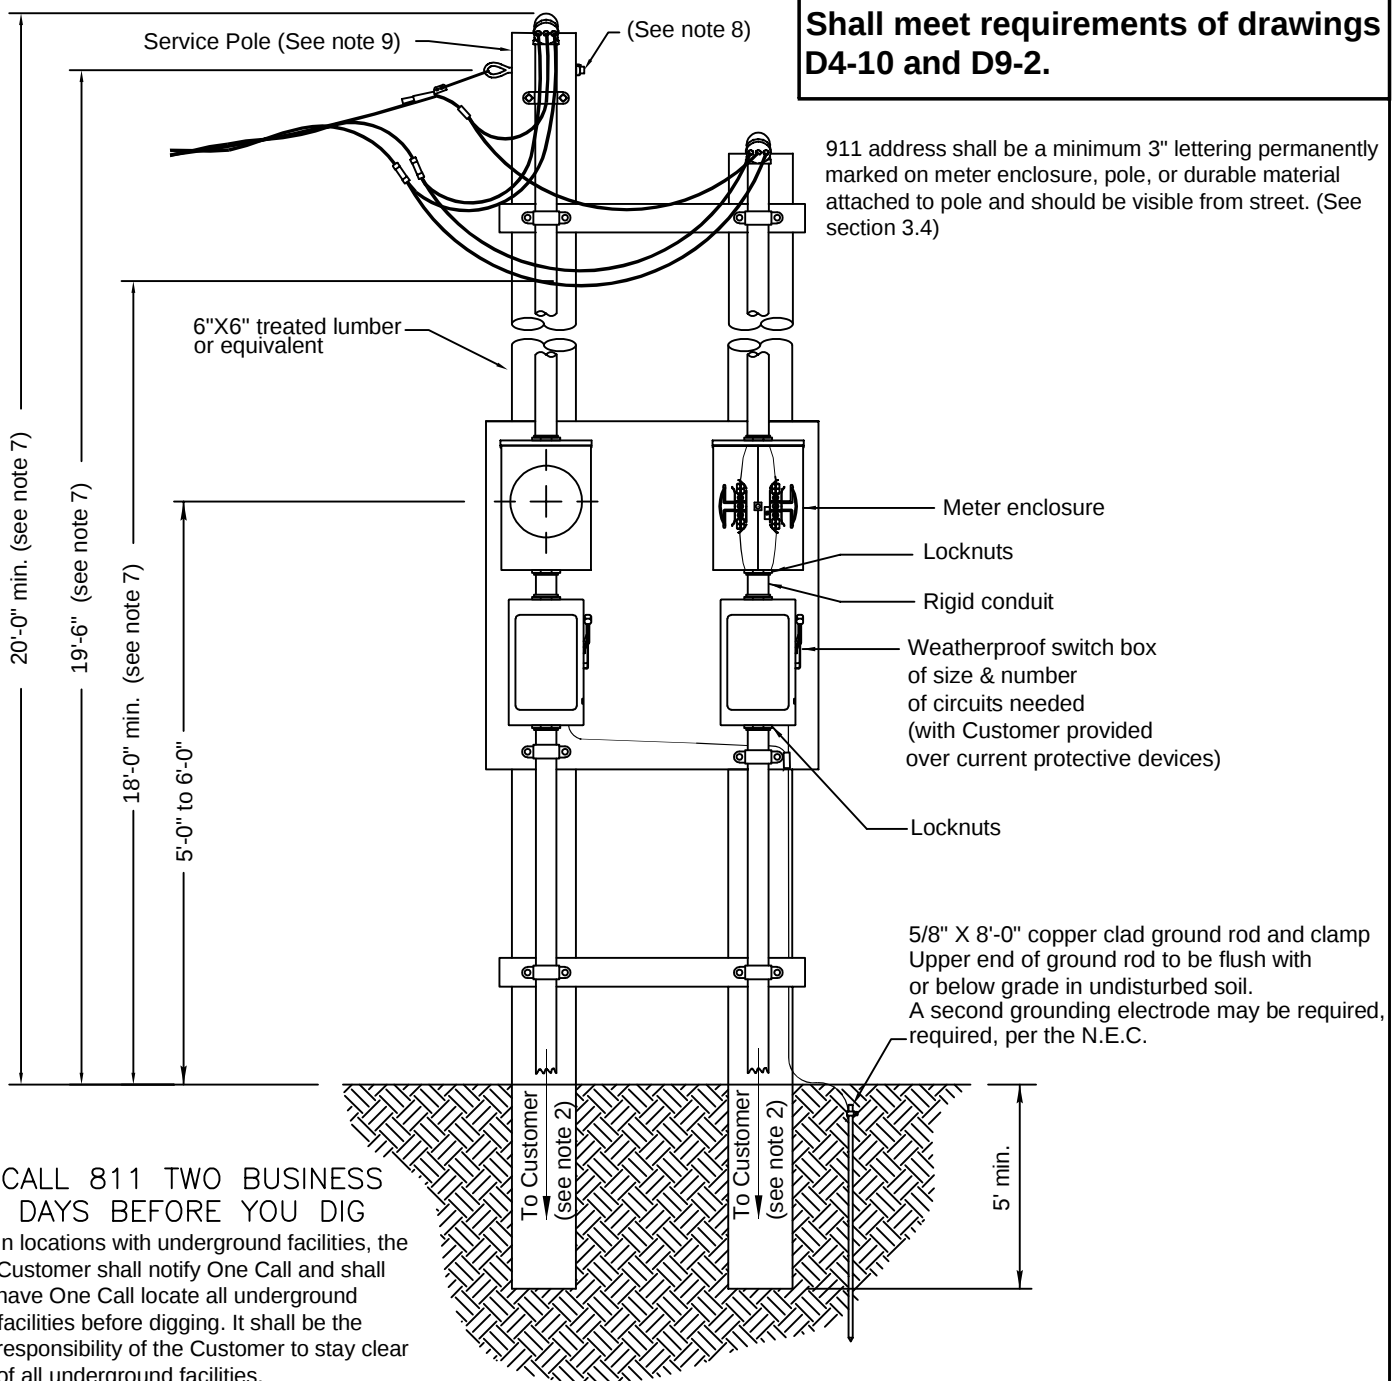

CALL 811 TWO BUSINESS DAYS BEFORE YOU DIG

In locations with underground facilities, the Customer shall notify One Call and shall have One Call locate all underground facilities before digging. It shall be the responsibility of the Customer to stay clear of all underground facilities.

NOTES:

- Customer facilities shall comply with Company Standards, the National Electrical Code (NEC), and authorities having jurisdiction.
- This installation applies to two (2) or more meters at one location. Maximum six (6) meters allowed per installation (3 per side).
- See section 4.7 for additional information on mobile home parks.
- Each meter and disconnect shall be plainly marked to designate unit served.
- All material shall be suitable for outdoor use.
- Equipment to be installed at a location designated by the Company.
- Additional pole height may be required to maintain proper clearance. (See section 7.3)
- Customer Installed minimum 1/2" galvanized eye bolt with 2" x 2" square washer recommended. Service Pole for service wires from Company to meter only.
- If Customer decides to distribute overhead, a separate pole from Service Pole shall be used.

Minimum Customer Wiring Size - Residence Single Phase **

METER SIZE	CONDUIT SIZE	Current carrying & neutral wire size (per NEC) *		GROUND WIRE SIZE
		ALUMINUM	COPPER	
100 Amp	1.5"	#2	#4	#6 *
200 Amp	2"	4/0	2/0	#4
320 Amp	3"	500	350	#2

* Wire sizes based upon customer breaker size

** For 3Ø, consult the Company Commercial & Industrial. Wire sizes are typically larger.

ENTERGY SERVICES, INC.

MULTIPLE METER SERVICE FOR MOBILE HOME 120/240 VOLT OVERHEAD SERVICE

APPROVED BY: GB DATE: 10/31/2012

CHECKED BY: EB SCALE: NONE

DRAWN BY: krich95




No. D4-9

PLOT 1=1 SH. 1 OF 1

3	11-3-25	REVISED PER CUSTOMER INSTALLATIONS 2025	ERG	EB
2	06/15/17	Revised dimensions and notes as needed.	ERG	
1	10/12	REVISIONS TO DRAWING SS4.7-1	JED	
NO.	DATE:	REVISION	BY:	APPR:

Shall meet requirements of drawings D4-10, D8-4, and D9-3.

911 address shall be a minimum 3" lettering marked on meter enclosure, pole, or durable material attached to pole and should be visible from street. (See section 3.4)

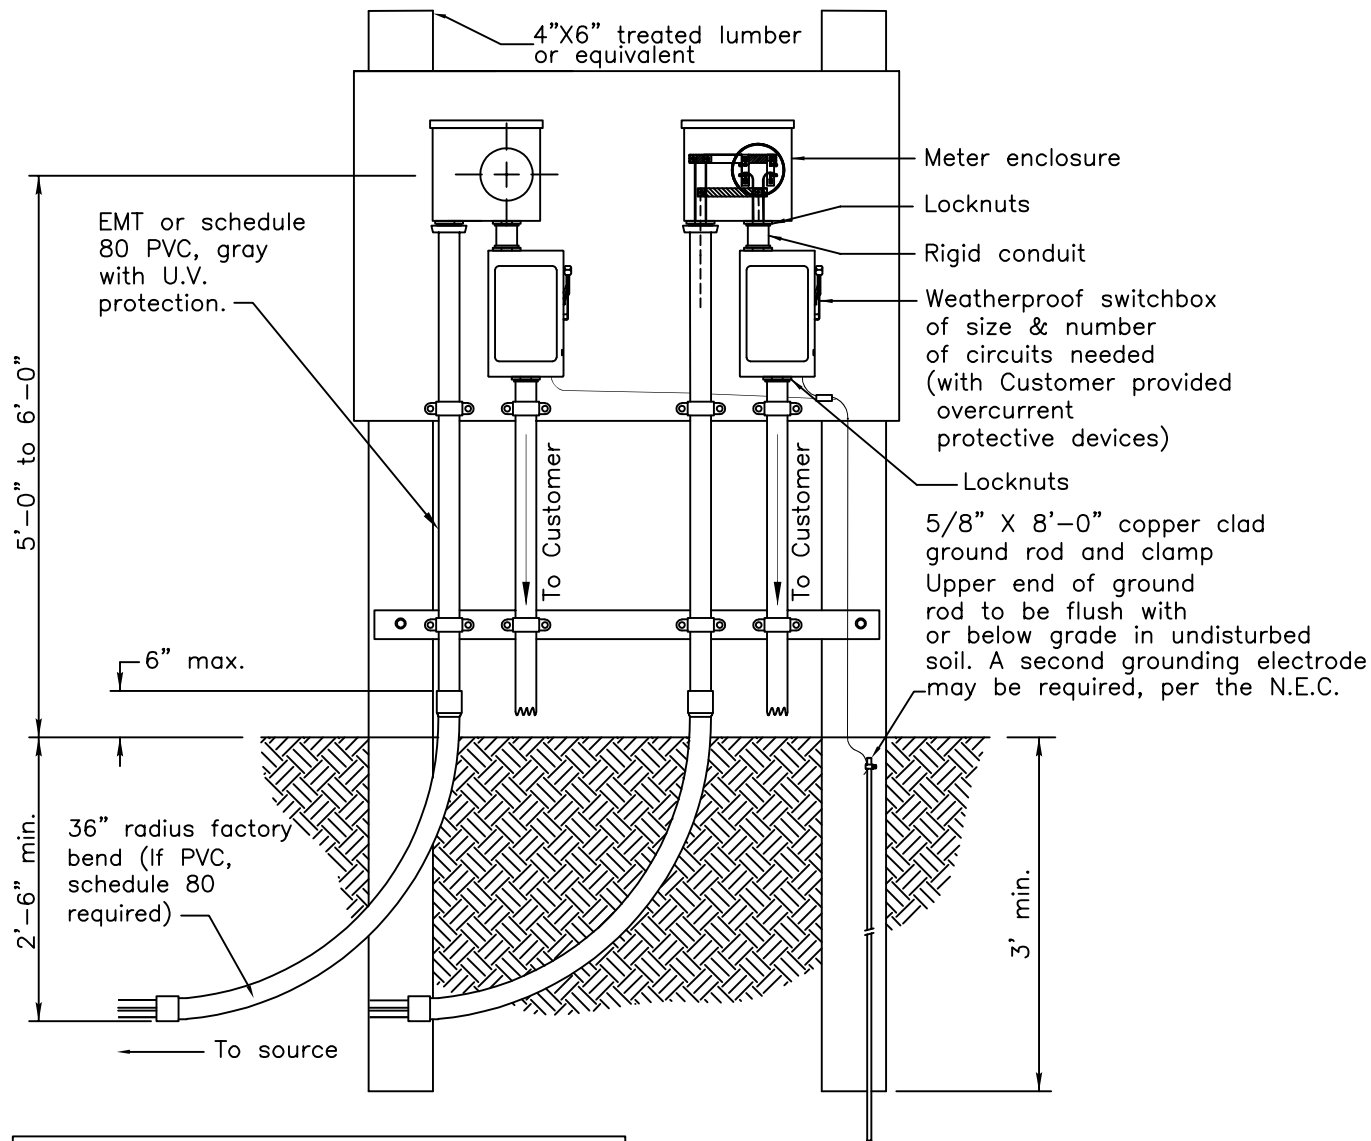

Minimum Customer Wiring Size - Family Residence Single Phase **

METER SIZE	CONDUIT SIZE	Current carrying & neutral wire size (per NEC)		GROUND WIRE SIZE
		ALUMINUM	COPPER	
100 Amp	2"	#2	#4	#6 *
200 Amp	2.5" ***	4/0	2/0	#4
320 Amp	3"	500	350	#2

* Wire sizes based upon customer breaker size.

** For 3Ø, consult the Company Commercial & Industrial. Wire sizes are typically larger shall meet requirements of D4-4 and D9-9.

***Arkansas only 2" permitted.

NOTES:

- Customer facilities shall comply with Company Standards, the National Electrical Code (NEC), and authorities having jurisdiction.
- This installation applies to two (2) or more meters at one location. Maximum six (6) meters allowed per installation (3 per side).
- See section 4.7 for additional information on mobile home parks.
- If a current transformer (CT) installation is required, see D9-6.
- Each meter and disconnect shall be plainly marked to designate unit served.
- The Customer shall install 80lb test nonmetallic (manila or grass) pull line or bull tape in the conduit.
- All material shall be suitable for outdoor use.
- Equipment to be installed at a location designated by the Company.

3	11-3-25	REVISED PER CUSTOMER INSTALLATIONS 2025	ERG	EB
2	06/15/17	Updated Meter Enclosure Diagram	ERG	
1	10/12	REVISION OF DRAWING SS4.7-2	JED	
NO.	DATE:	REVISION	BY:	APPR:

CALL 811 TWO BUSINESS DAYS BEFORE YOU DIG

In locations with underground facilities, the Customer shall notify One Call and shall have One Call locate all underground facilities before digging. It shall be the responsibility of the Customer to stay clear of all underground facilities.

ENTERGY SERVICES, INC.

MULTIPLE METER INSTALLATION FOR MOBILE HOME 120/240 VOLT UNDERGROUND SERVICE

APPROVED BY: GB	DATE: 10/24/2012
CHECKED BY: EB	SCALE: NONE
DRAWN BY: krich95	



No. D4-8

PLOT 1=1 SH. 1 OF 1