



CAUTION:
 Communication cable guying (telephone and cable television) shall be secured on an anchor owned by them. Guying to an anchor owned by the electric company is not allowed.

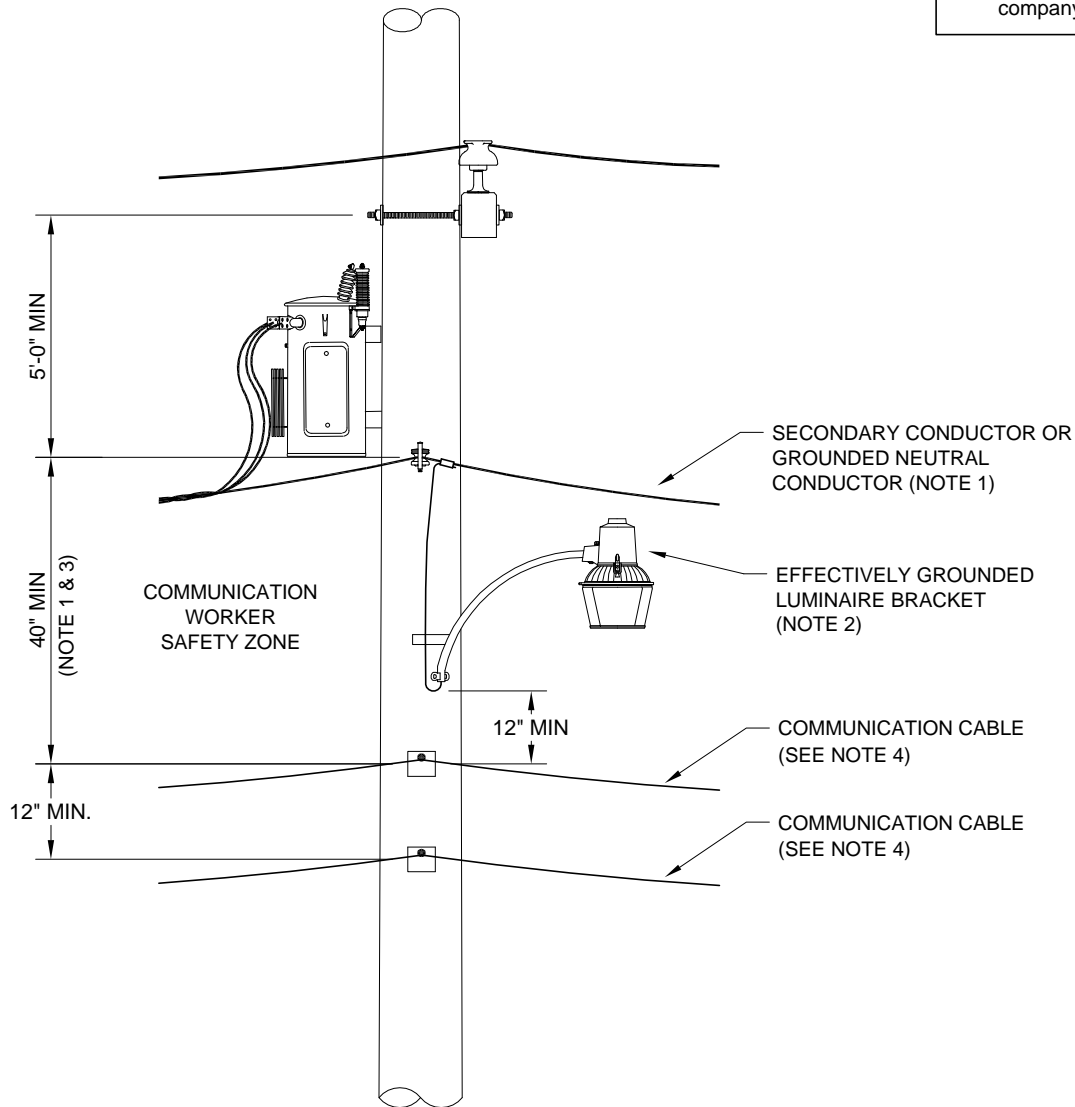

NOTES:

1. Where the lowest level electric conductor is greater than 8.7kV phase to ground, increased clearances are required. refer to N.E.S.C. tables 235-5, and 238-1.
2. An effectively grounded luminaire bracket must have a minimum of 4" vertical clearance from the communication cable bracket.
3. Minimum clearance of 40 inches is required from the secondary conductor or any other piece of electrical equipment, to the highest communication cable attachment.
4. All communication cable attachments shall be on the same side of the pole as the lowest level electric conductor.
5. See drawing DAS03141 for midspan clearances.
6. See drawing DAS03151 for joint use attachment clearances on poles that contain only primary conductors.

ENTERGY SERVICES, INC.			
COMMUNICATION CABLE CLEARANCES AND REQUIREMENTS TANGENT CONSTRUCTION			
APPROVED BY:	JRH	DATE:	5/28/02
CHECKED BY:	RHO	SCALE:	NONE
DRAWN BY:	DAT	CEA NO.	00000
		No. DAS03121	
PLOT	1=32	SH. 1	OF 1

NO.	DATE:	REVISION	BY:	APPR:
-----	-------	----------	-----	-------